

- 缠绕式弹性体，不移动驱动及被驱动设备即可更换弹性体
- 扭转弹性，零维护
- 质量轻，转动惯量小
- 缓解冲击，减小振动
- 轴向推入式，失效安全
- 动态平衡性好
- 弹性体最大扭矩是额定扭矩的2倍
- 安装运行维护指导，参见05.101号资料

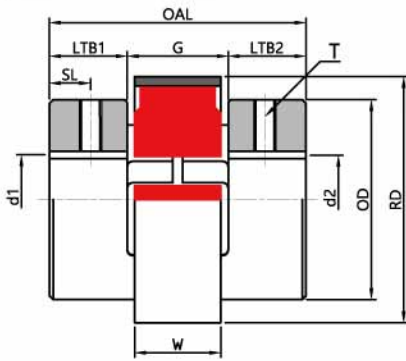


图05.04

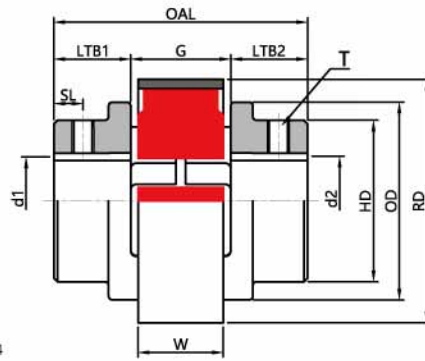


图05.05



表05.08

| 规格 | 类型 | OAL | LTB1-LTB2 | SL | G | T | d1-d2 | | W | RD | OD | HD |
|-------|----|-------|-----------|------|------|-----|-------|------|------|-------|-------|-------|
| | | | | | | | 最小开孔 | 最大开孔 | | | | |
| - | - | mm | mm | mm | mm | - | mm | mm | mm | mm | mm | mm |
| LS090 | 1 | 67.1 | 20.8 | 11.2 | 25.4 | M6 | 6 | 25 | 21.1 | 69.9 | 53.6 | 53.6 |
| LS095 | 1 | 76.2 | 25.4 | 11.2 | 25.4 | M8 | 11 | 29 | 21.1 | 69.9 | 53.6 | 53.6 |
| LS099 | 1 | 89.4 | 26.9 | 11.2 | 35.6 | M8 | 11 | 30 | 30.7 | 81.0 | 64.5 | 64.5 |
| LS100 | 1 | 105.7 | 35.1 | 11.2 | 35.6 | M8 | 11 | 35 | 30.7 | 81.0 | 64.5 | 64.5 |
| LS110 | 1 | 127.0 | 42.7 | 19.1 | 41.7 | M10 | 16 | 41 | 36.8 | 101.6 | 84.3 | 84.3 |
| LS150 | 1 | 138.2 | 44.5 | 19.1 | 49.3 | M10 | 16 | 48 | 43.4 | 119.1 | 95.3 | 95.3 |
| LS190 | 2 | 147.8 | 49.3 | 22.4 | 49.3 | M12 | 19 | 54 | 43.4 | 139.7 | 114.3 | 101.6 |
| LS225 | 2 | 160.0 | 55.4 | 25.4 | 19.3 | M12 | 19 | 67 | 43.4 | 155.7 | 127.0 | 108.0 |
| LS276 | 2 | 239.5 | 79.2 | 39.6 | 81.0 | M12 | 22 | 73 | 75.4 | 188.2 | 157.0 | 127.0 |
| CS280 | 2 | 239.5 | 79.2 | 39.6 | 81.0 | M12 | 32 | 76 | 75.4 | 227.1 | 190.5 | 139.7 |
| CS285 | 2 | 271.5 | 95.3 | 44.5 | 81.0 | M16 | 32 | 102 | 75.4 | 254.0 | 215.9 | 165.1 |