

- 适用于离心泵及类似应用
- 可以在不移动驱动及被驱动设备即可更换弹性体
- 扭转弹性，零维护
- 质量轻，转动惯量小
- 缓解冲击，减小振动
- 轴向推入式，失效安全
- 动态平衡性好
- 弹性体最大扭矩是额定扭矩的2倍
- 安装运行维护指导，参见05.101号资料

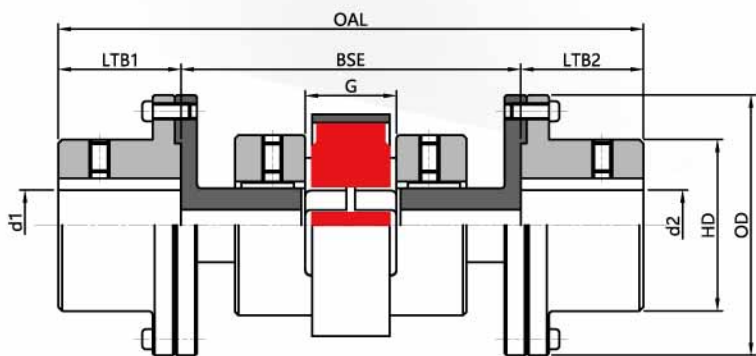


图05.06



表05.09

| 规格    | OAL   | LTB1-LTB2 | G    | d1-d2 |      | BSE   | OD    | HD    |
|-------|-------|-----------|------|-------|------|-------|-------|-------|
|       |       |           |      | 最小开孔  | 最大开孔 |       |       |       |
|       | mm    | mm        | mm   | mm    | mm   | mm    | mm    | mm    |
| LS090 | 159.0 | 34.9      | 25.4 | 12.7  | 35   | 88.9  | 101.6 | 52.3  |
|       | 197.1 | 34.9      | 25.4 | 12.7  | 35   | 127.0 | 101.6 | 52.3  |
|       | 247.9 | 34.9      | 25.4 | 12.7  | 35   | 177.8 | 101.6 | 52.3  |
|       | 298.7 | 34.9      | 25.4 | 12.7  | 35   | 228.6 | 101.6 | 52.3  |
| LS095 | 159.0 | 34.9      | 25.4 | 12.7  | 35   | 88.9  | 101.6 | 52.3  |
|       | 197.1 | 34.9      | 25.4 | 12.7  | 35   | 127.0 | 101.6 | 52.3  |
|       | 247.9 | 34.9      | 25.4 | 12.7  | 35   | 177.8 | 101.6 | 52.3  |
|       | 298.7 | 34.9      | 25.4 | 12.7  | 35   | 228.6 | 101.6 | 52.3  |
| LS099 | 159.0 | 34.9      | 35.6 | 12.7  | 35   | 88.9  | 101.6 | 52.3  |
|       | 197.1 | 34.9      | 35.6 | 12.7  | 35   | 127.0 | 101.6 | 52.3  |
|       | 247.9 | 34.9      | 35.6 | 12.7  | 35   | 177.8 | 101.6 | 52.3  |
|       | 298.7 | 34.9      | 35.6 | 12.7  | 35   | 228.6 | 101.6 | 52.3  |
| LS100 | 158.8 | 34.9      | 35.6 | 12.7  | 35   | 88.9  | 101.6 | 52.3  |
|       | 196.9 | 34.9      | 35.6 | 12.7  | 35   | 127.0 | 101.6 | 52.3  |
|       | 247.7 | 34.9      | 35.6 | 12.7  | 35   | 177.8 | 101.6 | 52.3  |
|       | 298.5 | 34.9      | 35.6 | 12.7  | 35   | 228.6 | 101.6 | 52.3  |
| LS110 | 209.6 | 41.3      | 41.7 | 12.7  | 41   | 127.0 | 111.3 | 59.4  |
|       | 260.4 | 41.3      | 41.7 | 12.7  | 41   | 177.8 | 111.3 | 59.4  |
|       | 310.9 | 41.3      | 41.7 | 12.7  | 41   | 228.6 | 111.3 | 59.4  |
| LS150 | 235.2 | 54.0      | 49.3 | 12.7  | 54   | 127.0 | 117.3 | 78.5  |
|       | 285.8 | 54.0      | 49.3 | 12.7  | 54   | 177.8 | 117.3 | 78.5  |
|       | 336.6 | 54.0      | 49.3 | 12.7  | 54   | 228.6 | 117.3 | 78.5  |
| LS190 | 298.5 | 60.3      | 49.3 | 12.7  | 60   | 177.8 | 138.2 | 60.5  |
|       | 349.3 | 60.3      | 49.3 | 12.7  | 60   | 228.6 | 138.2 | 60.5  |
| LS225 | 323.9 | 73.0      | 49.3 | 19.1  | 73   | 177.8 | 150.9 | 73.2  |
|       | 374.7 | 73.0      | 49.3 | 19.1  | 73   | 228.6 | 150.9 | 73.2  |
| LS276 | 552.7 | 79.4      | 81.0 | 19.1  | 79   | 228.6 | 162.1 | 109.5 |
| CS280 | 615.7 | 88.9      | 81.0 | 27.0  | 89   | 228.6 | 193.5 | 122.2 |
| CS285 | 406.4 | 88.9      | 81.0 | 27.0  | 89   | 228.6 | 193.5 | 122.2 |