



- Use wrap elastomer, the elastomer can be replaced without moving the drive and the driven device.
- Suitable for speeds above 1750rpm.
- Standard L Series hub.
- Torsional flexibility, maintenance-free.
- Compact structure, light mass, small moment of inertia.
- Damping impact and vibration.
- Axial plug-in, fail-safety.
- Good dynamic properties.
- Refer to document No. 04.102 for installation, operation and maintenance instructions.

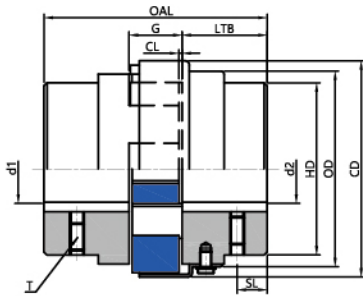


Type 1

Fig04.27



Type 2

Fig04.28

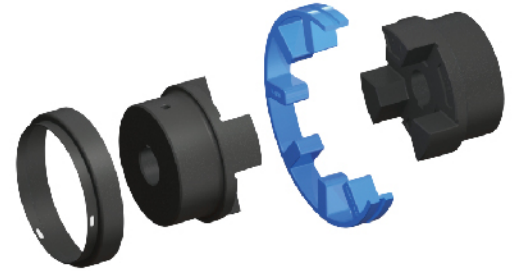

04.21

Size	Type	Rated Torque Nm			Dimension mm							Screw		
		NBR	TPU	Hytrel	d1-d2	OAL	LTB	G	OD	HD	CD	SL	T	T _A
-	-	16.3	24.4	45.3	6-25	53.85	20.57	12.70	53.59	53.59	64.52	11.18	M6	5.0
LC090	1	21.9	32.9	63.4	11-29	63.50	25.40	12.70	53.59	53.59	64.52	11.18	M8	10
LC095	1	35.9	53.9	89.5	11-30	72.90	26.92	19.05	64.26	64.26	78.99	11.18	M8	10
LC099	1	47.1	70.7	128.0	11-35	88.90	35.05	19.05	64.26	64.26	78.99	11.18	M8	10
LC100	1	89.5	134.0	256.0	16-41	107.95	42.93	22.10	84.07	84.07	96.77	19.05	M8	10
LC110	1	140.0	210.0	419.0	16-48	114.30	44.45	25.40	95.25	95.00	112.01	19.05	M8	10
LC150	1	195.0	293.0	529.0	19-54	123.95	49.28	25.40	107.95	101.60	127.25	22.35	M12	45
LC190	2	264.0	397.0	704.0	22-67	136.65	55.63	25.40	127.00	107.95	142.49	25.40	M12	45

- D is the bore diameter, the metric cylindrical bore executes GB3852-2107 standard, tolerance H7, flat keyway, also executes GB/T1095-2003 standard, tolerance JS9. The inch bore implements the AGMA9002-C14 standard, the bore is a clearance fit, and the keyway is a commercial grade.
- Hexagon socket set screw with cup point, comply with GB/T80-2007, hardness level 45H. TA indicates the tightening torque (unit: Nm).
- Taper bore, spline bore details, please contact RUVJAX