

- Use block elastomer, elastomer can be replaced without moving the drive and the driven device
- Standard metric intermediate spacer length for industrial process pumps.
- Torsional flexibility, maintenance-free.
- Compact structure, light mass, small moment of inertia.
- Damp impact and vibration.
- Axial plug-in, fail-safety.
- Good dynamic properties
- Refer to document No. 04.106 for installation, operation and maintenance instructions.


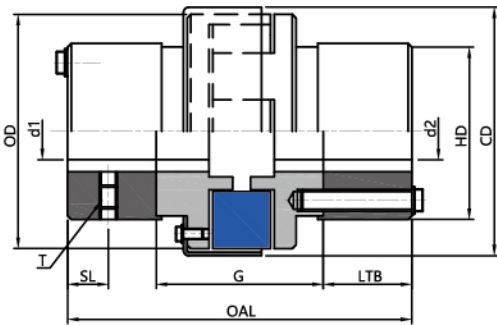


Fig04.36

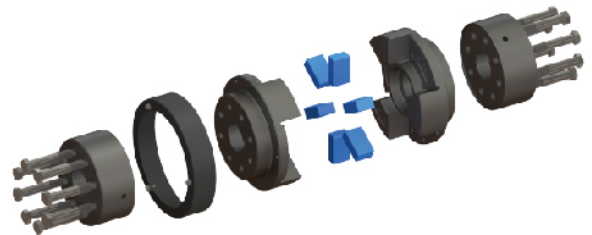

4.26

Size	Type	Rated Torque Nm		Dimension mm								Screw	
		NBR	Hytrel	d1-d2	OAL	LTB	G	OD	HD	CD	SL	T	T _A
RRC226	4	338	671	22-54	233.2	72.14	88.9	131.06	104.65	139.70	35.05	M12	45
	4	338	671	22-54	271.3	72.14	127.0	131.06	104.65	139.70	35.05	M12	45
	4	338	671	22-54	322.1	72.14	177.8	131.06	104.65	139.70	35.05	M12	45
RRC276	4	533	1066	22-73	214.4	62.74	88.9	156.97	127.00	165.10	25.40	M12	45
	4	533	1066	22-73	252.5	62.74	127.0	156.97	127.00	165.10	25.40	M12	45
	4	533	1066	22-73	303.3	62.74	177.8	156.97	127.00	165.10	25.40	M12	45
RRC280	4	854	1567	32-86	214.4	62.74	88.9	190.50	139.70	198.37	25.40	M16	90
	4	854	1567	32-86	252.5	62.74	127.0	190.50	139.70	198.37	25.40	M16	90
	4	854	1567	32-86	303.3	62.74	177.8	190.50	139.70	198.37	25.40	M16	90
RRC285	4	1038	1882	32-105	234.8	72.90	88.9	215.90	165.10	225.55	25.40	M16	90
	4	1038	1882	32-105	272.9	72.90	127.0	215.90	165.10	225.55	25.40	M16	90
	4	1038	1882	32-105	323.7	72.90	177.8	215.90	165.10	225.55	25.40	M16	90
RRC295	4	1281	2562	38-105	241.3	69.85	101.6	231.65	165.10	242.82	35.05	M16	90
	4	1281	2562	38-105	266.7	69.85	127.0	231.65	165.10	242.82	35.05	M16	90
	4	1281	2562	38-105	317.5	69.85	177.8	231.65	165.10	242.82	35.05	M16	90
RRC2955	4	2136	4271	44-105	241.3	69.85	101.6	231.65	165.10	242.82	47.75	M16	90
	4	2136	4271	44-105	266.7	69.85	127.0	231.65	165.10	242.82	47.75	M16	90
	4	2136	4271	44-105	317.5	69.85	177.8	231.65	165.10	242.82	47.75	M16	90

- D is the bore diameter, the metric cylindrical bore executes GB3852-2107 standard, tolerance H7, flat keyway, also executes GB/T1095-2003 standard, tolerance JS9. The inch bore implements the AGMA9002-C14 standard, the bore is a clearance fit, and the keyway is a commercial grade.
- Hexagon socket set screw with cup point, comply with, GB/T80-2007, hardness level 45H. TA indicates the tightening torque (unit: Nm).
- Taper bore, spline bore details, please contact RUVJAX