




- Use wrap elastomer, the elastomer can be replaced without moving the drive and the driven device.
- Standard metric intermediate spacer length for industrial process pumps.
- Torsional flexibility, maintenance-free.
- Compact structure, light mass, small moment of inertia.
- Damp impact and vibration.
- Axial plug-in, fail-safety.
- Good dynamic properties.
- Refer to document No. 04.103 for installation, operation and maintenance instructions.

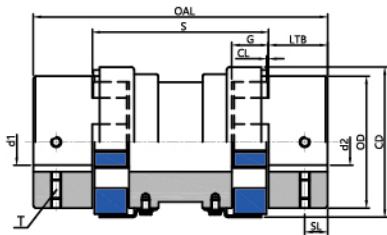

Type 1 Fig 04.31

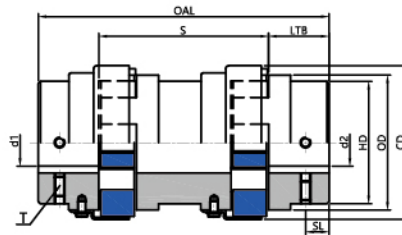

Type 2 Fig 04.32

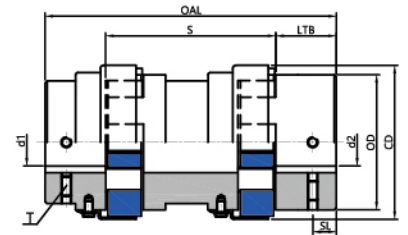

Type 3 Fig 04.33

04.23

Size	Type	Rated Torque Nm			Dimension mm										Screw	
		NBR	TPU	Hytrel	d1-d2	OAL	LTB	G	S	CL	OD	HD	CD	SL	T	T _A
RRS090	1	16.3	24.4	45.3	6-25	141	20.57	12.70	100	2.29	53.59	-	63.50	10.92	M6	5.0
	1	16.3	24.4	45.3	6-25	181	20.57	12.70	140	2.29	53.59	-	63.50	10.92	M6	5.0
	1	16.3	24.4	45.3	6-25	221	20.57	12.70	180	2.29	53.59	-	63.50	10.92	M6	5.0
RRS095	1	21.9	32.9	63.4	11-29	151	25.40	12.70	100	2.29	53.59	-	63.50	10.92	M8	10
	1	21.9	32.9	63.4	11-29	191	25.40	12.70	140	2.29	53.59	-	63.50	10.92	M8	10
	1	21.9	32.9	63.4	11-29	231	25.40	12.70	180	2.29	53.59	-	63.50	10.92	M8	10
RRS099	1	35.9	53.9	89.5	11-30	154	26.92	19.05	100	3.05	64.26	-	79.25	11.18	M8	10
	1	35.9	53.9	89.5	11-30	194	26.92	19.05	140	3.05	64.26	-	79.25	11.18	M8	10
	1	35.9	53.9	89.5	11-30	234	26.92	19.05	180	3.05	64.26	-	79.25	11.18	M8	10
RRS100	1	47.1	70.7	128	11-35	170	35.05	19.05	100	3.05	64.26	-	79.25	11.18	M8	10
	1	47.1	70.7	128	11-35	210	35.05	19.05	140	3.05	64.26	-	79.25	11.18	M8	10
	1	47.1	70.7	128	11-35	250	35.05	19.05	180	3.05	64.26	-	79.25	11.18	M8	10
RRS110	1	89.5	134	256	16-41	186	42.67	22.10	100	3.05	84.07	-	96.77	19.05	M8	10
	1	89.5	134	256	16-41	226	42.67	22.10	140	3.05	84.07	-	96.77	19.05	M8	10
	1	89.5	134	256	16-41	266	42.67	22.10	180	3.05	84.07	-	96.77	19.05	M8	10
RRS150	2	140	210	419	19-48	189	44.45	25.40	100	3.05	95.25	-	112.78	15.75	M8	10
	2	140	210	419	19-48	229	44.45	25.40	140	3.05	95.25	-	112.78	15.75	M8	10
	2	140	210	419	19-48	269	44.45	25.40	180	3.05	95.25	-	112.78	15.75	M8	10
RRS190	3	195	293	529	19-54	199	49.28	25.40	100	3.05	114.30	101.60	127.00	22.35	M12	45
	3	195	293	529	19-54	239	49.28	25.40	140	3.05	114.30	101.60	127.00	22.35	M12	45
	3	195	293	529	19-54	277	49.28	25.40	180	3.05	114.30	101.60	127.00	22.35	M12	45
RRS225	3	264	397	704	19-67	221	55.37	25.40	100	3.05	127.00	107.95	142.75	25.40	M12	45
	3	264	397	704	19-67	261	55.37	25.40	140	3.05	127.00	107.95	142.75	25.40	M12	45
	3	264	397	704	19-67	291	55.37	25.40	180	3.05	127.00	107.95	142.75	25.40	M12	45

- D is the bore diameter, the metric cylindrical bore executes GB3852-2107 standard, tolerance H7, flat keyway, also executes GB/T1095-2003 standard, tolerance JS9. The inch bore implements the AGMA9002-C14 standard, the bore is a clearance fit, and the keyway is a commercial grade.
- Hexagon socket set screw with cup point, comply with, GB/T80-2007, hardness level 45H. TA indicates the tightening torque (unit: Nm).