


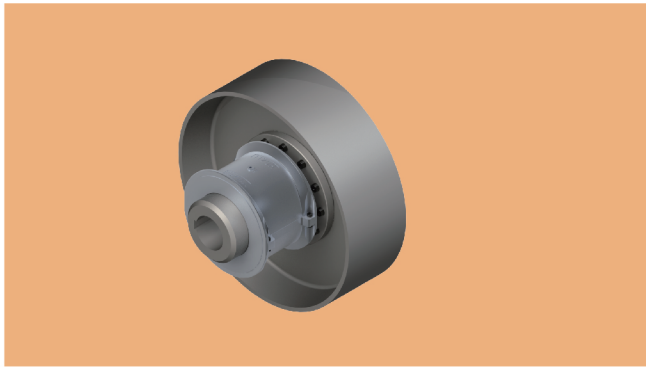

- 配备制动鼓
- 可选择多种轴毂联接方式
- 油脂润滑
- 扭转弹性
- 缓解冲击，减小振动
- 水平中开型外壳，安装方便
- 分片式弹簧，可不移动驱动及被驱动设备更换弹簧
- 弹簧的最大扭矩是额定扭矩的2倍

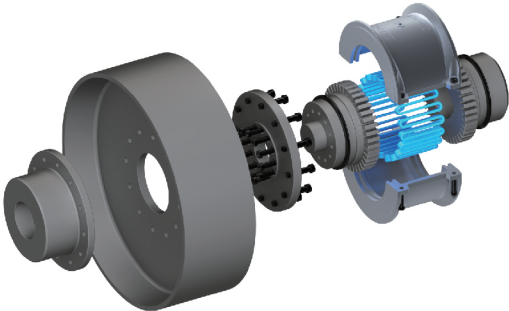

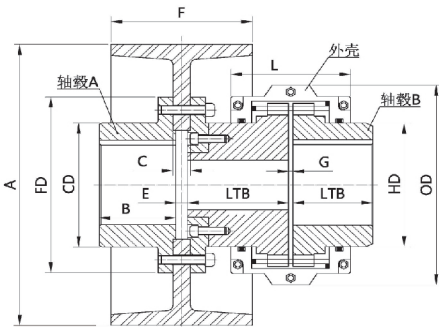


图07.24

表07.12

规格	额定制动 扭矩	制动鼓规格 A x F	允许转速	轴毂孔径 mm		B	FD	CD	HD	OD	E	C	L	LTB	G	润滑剂 质量	法兰螺钉	
				最大孔径														
-	Nm	mm	rpm	轴毂A	轴毂B	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	数量	规格
1020H-TBW	16.3	200x75	4500	35	30	34.9	85.7	52.4	39.7	101.6	10	14.0	66.5	47.5	3.0	0.03	4	M6
1030H-TBW	57.0	200x75	4500	43	35	41.3	93.7	59.5	49.2	110.0	10	14.0	68.3	47.5	3.0	0.04	8	M6
1040H-TBW	106.0	200x75	4500	56	43	54.0	112.7	78.6	57.2	117.5	10	14.0	70.0	50.8	3.0	0.05	8	M6
1050H-TBW	203.0	250x95	4150	67	50	60.3	125.4	87.3	66.7	138.0	12	16.0	79.5	60.3	3.0	0.07	8	M8
1060H-TBW	332.0	200x85	3800	80	55	73.0	144.5	103.2	76.2	150.5	12	16.0	92.0	63.5	3.0	0.09	8	M8
1070H-TBW	515.0	315x125	3250	85	65	79.4	152.4	109.5	87.3	161.9	14	19.0	95.0	76.2	3.0	0.11	12	M8
1080H-TBW	1166.0	315x135	2650	95	78	88.9	177.8	122.2	104.8	194.0	14	19.0	116.0	88.9	3.0	0.17	12	M12
1090H-TBW	2034.0	400x160	2500	110	95	101.6	209.6	142.9	123.8	213.0	14	19.0	122.0	98.4	3.0	0.25	12	M14
1100H-TBW	3526.0	400x200	2400	130	107	90.4	250.8	171.4	142.1	250.0	16	22.0	155.5	120.6	4.5	0.43	12	M16
1110H-TBW	5288.0	500x210	2250	150	117	104.1	276.2	196.8	160.3	270.0	16	22.0	161.5	127.0	4.5	0.51	12	M16
1120H-TBW	7729.0	500x210	2050	170	136	119.4	319.1	225.4	179.4	308.0	20	28.5	191.5	149.2	6.0	0.73	12	M16
1130H-TBW	11255.0	630x240	1800	190	165	134.6	346.1	238.1	217.5	346.0	20	28.5	195.0	161.9	6.0	0.91	12	M24
1140H-TBW	16272.0	800x300	1650	210	184	152.4	358.8	266.7	254.0	384.0	20	30.0	201.0	182.8	6.0	1.13	12	M24

- 最大扭矩为额定扭矩的2倍。
- 更多尺寸更多规格，请咨询乐兆传动。