


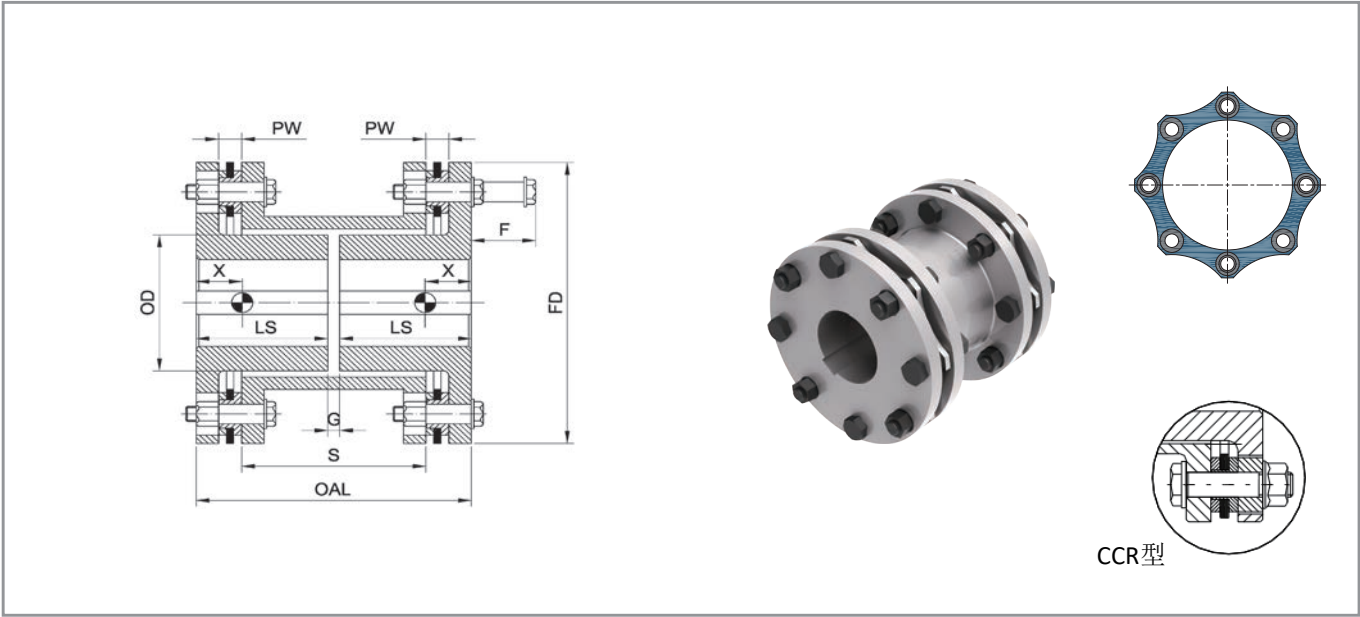

规格	额定 扭矩	最大 扭矩	最大 转速	最大 开孔	FD	OD	LS	G	S	PW	OAL	F	重心 X	扭转 刚度	转动 惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	MNm/rad	kgm ²	kg
202-8	8000	16000	9600	75	202	116	90	6	127.0	15.5	186	75	35.7	1.669	0.0842	21.5
228-8	11500	23000	8500	85	228	133	100	6	139.0	17.5	206	85	40.3	2.307	0.1562	30.8
255-8	15000	30000	7700	95	256	147	115	6	155.0	20.5	236	100	46.0	2.943	0.2804	45.2
278-8	20000	40000	7000	105	278	168	125	8	175.6	21.2	258	105	50.3	3.740	0.4407	60.2
302-8	30000	60000	6400	115	302	182	135	8	185.2	24.4	278	115	55.6	4.606	0.6634	75.6
325-8	37000	74000	6000	125	325	201	145	8	202.0	26.0	298	115	60.0	5.508	0.9621	94.6
345-8	46000	92000	5500	130	345	212	155	8	213.6	28.2	318	125	64.7	6.780	1.3147	115.0
380-8	63000	126000	5100	145	380	230	170	10	232.0	32.0	350	140	70.5	10.626	2.1051	151.5
410-8	86000	172000	4700	155	410	246	185	10	253.6	33.2	380	150	76.8	14.552	3.1958	198.0
440-8	110000	220000	4350	160	440	254	195	10	261.2	36.4	400	165	82.1	16.524	4.4877	245.4
475-8	138000	276000	4200	165	475	282	210	10	281.6	38.2	430	180	87.8	21.711	6.6456	322.7
505-8	175000	350000	3800	170	505	296	230	12	310.0	42.0	472	195	95.6	25.487	9.1049	393.4
540-8	220000	440000	3600	165	540	311	240	20	324.0	46.0	500	210	100.5	34.188	12.8188	496.5
570-8	259000	518000	3400	170	570	326	250	40	346.8	51.6	540	230	105.9	+	17.0783	606.2
605-8	315000	630000	3200	179	605	342	265	40	367.6	53.2	570	240	111.1	+	23.1462	726.8
635-8	383000	766000	3100	188	635	354	280	65	399.4	60.8	625	265	120.1	+	29.9984	885.2
675-8	454000	908000	2900	199	675	378	300	70	427.6	65.2	670	280	127.9	+	41.6345	1096.7
700-8	528000	1056000	2800	207	700	394	315	85	457.4	68.8	715	300	135.7	+	52.0468	1224.3
730-8	608000	1216000	2700	218	730	420	330	70	467.6	71.2	730	305	143.0	+	65.9506	1417.6
760-8	700000	1400000	2600	228	760	436	350	70	496.4	72.8	770	320	149.1	+	79.6952	1624.4
810-8	885000	1770000	2400	235	810	454	365	85	511.4	76.8	815	330	155.3	+	106.4879	1933.2
875-8	1161000	2322000	2200	250	875	496	390	85	540.8	85.6	865	340	166.0	+	151.9521	2381.5
935-8	1460000	2920000	2000	260	935	524	410	90	566.8	89.6	910	360	176.1	+	208.6869	2876.4
1000-8	1836000	3672000	1800	275	1000	566	450	95	628.2	94.4	995	370	186.9	+	287.2866	3478.7
1060-8	2271000	4542000	1500	295	1060	608	490	100	681.6	99.2	1080	390	201.0	+	394.7715	4188.6

• 表中所列扭转刚度为标准尺寸时整套产品扭转刚度，如轴毂长度LS及中间段长度S发生变化，整体扭转刚度需重新计算，其中膜片扭转刚度参见第12页，中间段扭转刚度参见第22页。

+ 请咨询乐兆传动。